

~~4063~~
915F.9




[S.S. 702.]


BIBLIOTECA DO EXERCITO
 (Antiga Biblioteca do E. M. E.)
 N.º 915
 CUSTO _____
 Aumentado em 17-9-19
 Livro N.º _____ Pag. _____

YUKON PACK.

Instructions for Use.

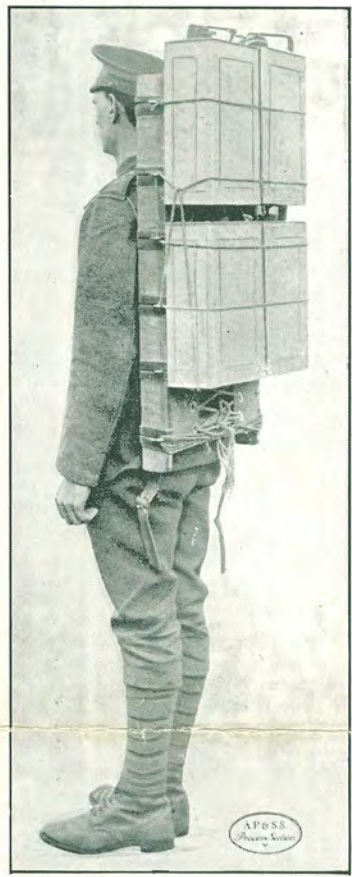


1. See that the canvas on pack is laced very tightly before putting the load on.
2. The lashing cord should be of good quality about $\frac{1}{2}$ -inch thick and 30 feet long. For heavy small loads it should be used double.
3. See that the lashing cord is permanently attached to the top crossbar, close to the side bar.
4. Place the load well up near the top of the pack and in the centre of the laced side. Pass the cord from side to side over the load, and if necessary, round the bottom.
5. Do not tie any knots in the lash cord (round the hooks or otherwise), until the final knot at the end of the lashing, the reason for this being, that, as the load settles down, the cord slips through the hooks and gradually takes the same strain throughout.
6. A long walking staff should be used and will be found of great assistance over broken ground.
7. The rifle can be slung on one side of the pack.
8. There are two methods suggested for carrying ordinary loads.

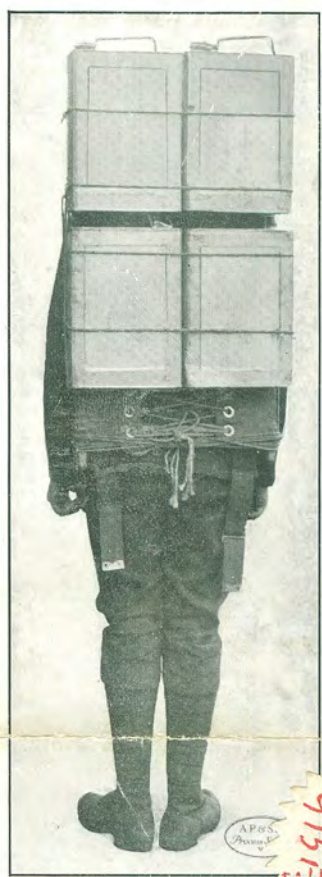

~~4063~~
915F.9

No. 1.—For easy loads such as water tins, square boxes, etc.—place them pointing up and down the pack. Bring the lashing over the top of the load from hook A to hook B, then from B to D, then over the load again from D to C, then from C to E, and over the load again from E to F and so on—keeping the bottom cross lashing at least 6 inches above the bottom of the load.

To secure, pass the lashing round the cross cord near the second hook above the last hook used, and pull tightly downwards, then pass the lashing round the bottom of the load catching the bottom cross cord on the opposite side four inches from the hook, pull sharply downwards and tie securely.

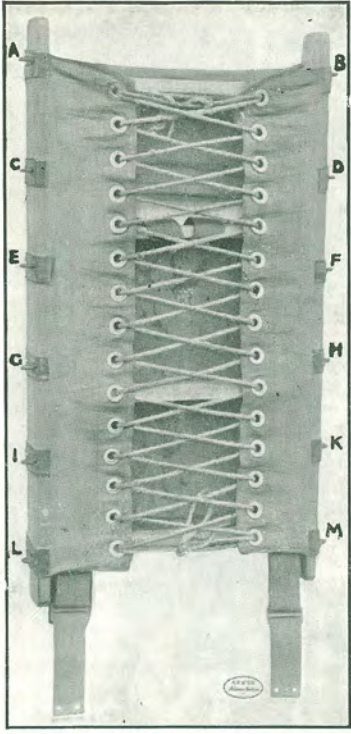

No. 2.—For difficult loads such as coils of wire, drums, one or more sandbags containing grenades, S.M.A. or T.M. shells, lay the drums or sacks across the pack. Bring the lashing from A to B, from B to E or lower if necessary but never using a hook lower than one inch below the bottom of the load.

Then take the lashing across the pack close to and free from the load to the hook immediately opposite and from there to A. From A over the centre of the load catch the lowest cross lashing and pull tightly upwards, pass the lashing again over the centre of the load, catch the lashing from A to B, pull tightly downwards and tie securely.